



**Finally...**

**A High-Strength Grout with the Long Working Time  
You NEED to Get the Job Done!**

## **FIVE STAR® HIGH STRENGTH 130 GROUT**

**High Strength 130 Grout** is the only 13,000 psi precision cementitious grout with a 60-minute working time which allows for

- Monolithic foundation pours
- Large and long placements
- Bulk bag mixing capability
- Placements at higher ambient temperatures

**High Strength 130 Grout** is the newest addition to the Five Star® cementitious grout portfolio. It is a non-metallic, non-shrink, semi-fluid, high-strength, precision, cementitious grout. Due to its Air Release Technology formulation, this grout combines high performance with the greatest reliability. You can count on High Strength 130 Grout to consistently deliver the same results on all your jobsites.



Call the experts at 1-800-243-2206 • [FiveStarProducts.com](http://FiveStarProducts.com)




**HIGH STRENGTH • BULK BAG MIXING CAPACITY • EXCELLENT FLOWABILITY**

**Heavy Machinery & Equipment**

**Tanks & Vessels**

**High Load Infrastructure**

**Monolithic Foundations**

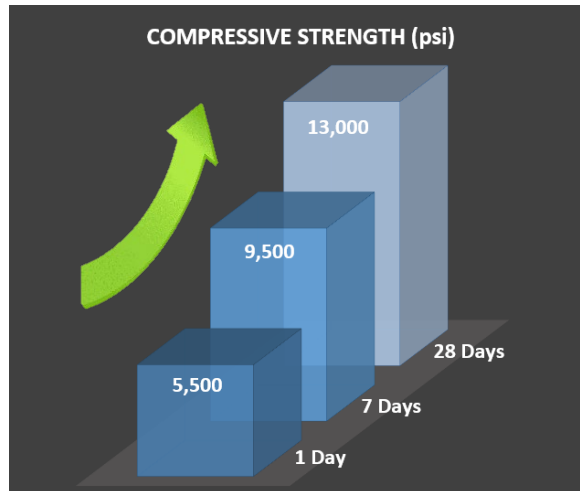

Non-shrink from time of placement, High Strength 130 Grout is easy to place and can be installed at temperatures between 40°F and 90°F (4°C and 32°C).

Due to its 60-minute working time formulation, High Strength 130 Grout is available in 3,000 lb. bulk bags.

## Five Star® Industrial Market Segments



Five Star Products formulates and manufactures high-performance, precision, cementitious and epoxy grouts and concrete repair products, specifically for challenging applications and environments.

Five Star Products offers unparalleled technical support and expert guidance at the engineering, plant, and contractor levels to ensure proper product installation and project success.

**FIVE STAR PRODUCTS, INC.**

2 Enterprise Drive • Suite 303 • Shelton, CT 06484-4656 USA

Phone: +1 203-336-7900 • Sales/Support: 1-800-243-2206

[FiveStarProducts.com](http://FiveStarProducts.com)

©2023 Five Star Products, Inc  
na13358eng Rev A

