

NEW

Crack Repair SLV

Low-Viscosity Polyurethane Crack Repair
for Horizontal Surfaces



FIVE STAR

Specified by the World's Best™

Five Star® Crack Repair SLV


This very low viscosity, two-component hybrid polyurethane has been specifically engineered for use as an easy to apply, rapid curing concrete repair material requiring minimal down time. Its low viscosity offers deep penetration into hairline cracks for structural repair. By adding aggregate this product can also be used for very fast turnaround spall and joint repairs.

ADVANTAGES

- Very low viscosity
- Fast turnaround
- Can be used in temperatures ranging from 0° F to 115° F (-18° to 46° C)
- Traffic ready in 1 hour
- Solvent free / No VOC content
- Self-leveling

USES

- Industrial floor repair
- Spall repair when mixed with aggregate
- Fill hairline cracks
- Parking deck and concrete bridge repair
- Interior and exterior application with minimal color change
- Provides a continuous surface for weight loading

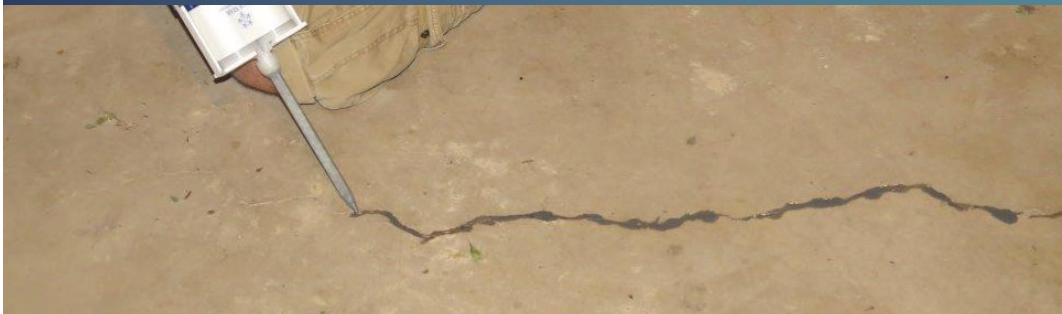

SKU/PRODUCT CODE	DESCRIPTION	UNIT SIZE
30792	Five Star® Crack Repair SLV	21.2 oz. (627 ml) Cartridge



FIVE STAR

Specified by the World's Best™



FIVE STAR PRODUCTS, INC.
60 Parrott Drive • Shelton, CT 06484-4733 USA
Phone: +1 203-336-7900 • Fax: +1 203-336-7930
Support: 1-800-243-2206

FiveStarProducts.com

Contact your
local sales representative
or call us directly
for more information.