

CEMENT AND EPOXY MAINTENANCE AND REPAIR SOLUTIONS FOR

Cold-Weather Grouting

When you purchase Five Star grout products, you're not only getting a reliable, time-proven product, you're getting a support team from the manufacturer with years of engineering and technical experience in the grouting industry.










For product information go to FiveStarProducts.com

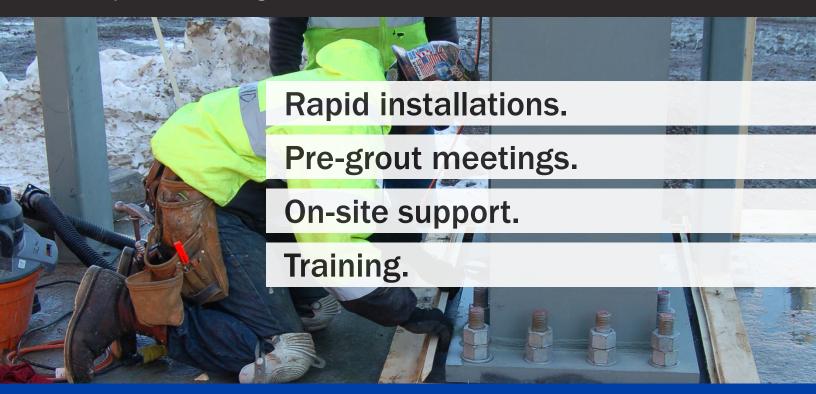



© 2020 Five Star Products, Inc. | 12243 Rev. E | 111320

Are you ready?

Five Star Products carries multiple solutions that will keep you in business during the cold winter months.

Contact us now to discuss how these products can help you with labor and time savings.

COLD-WEATHER FRIENDLY

Cement and Epoxy Maintenance & Repair Products

For detailed information on Cold Weather Grouting download our Tech Bulletins from

FiveStarProducts.com

INSTALLATION SURFACE **FIVE STAR® PRODUCT DESCRIPTION APPLICATIONS TEMPERATURES** A one-component, fast-setting hydraulic ce-Highway Patch -Highways and bridges - parking decks and ramps - airport runways and ment ideal for concrete repairs in high-traffic 35-75°F (2-24°C) Winter Grade taxiways = expansion joint rebuild = dowel bar retrofits areas during cold weather conditions. Permanent support for high-load machinery - light vibratory equipment Excellent flowability while reaching high early structural steel and precast concrete = support for tanks, vessels, gen-**Hybrid Grout** 35-100°F (2-38°C) and ultimate compressive strengths. erators and small pumps = wind turbines = seismic applications = rebar, anchors and dowels Originally developed for use on the Alaska Grouting of machinery baseplates to maintain precision alignment • Pipeline. Can be poured in near-freezing grouting of structural steel and precast concrete - support of tanks and 40-90°F (4-32°C) Instant Grout vessels • installation of anchors and dowels temperatures without any heating. Grouting of machine baseplates under high impact and vibration down High eight-hour strength for fast turnaround **Rapid Epoxy Grout** to 1/2" clearance = installation of anchors and dowels = aggressive 55-90°F (13-32°C) precision grouting with excellent flowability. chemical environments Rapid setting, high-performance polymer Cracks, potholes and spalls - expansion joint and bridge header recon-**Rapid Surface Repair** with fast turnaround times used to repair and struction = control joint filler = airport runways, walkways, floors and 0-100°F (-18-37°C). Easy Mix™ rehabilitate concrete and asphaltic concrete parking lots - airport lighting cans and conduit channels pavements. High early strength, single component, Construction joint repair = tanks, sumps and curbs = concrete structures permanent concrete repair material with Structural Concrete® • rapid machinery foundation rebuilds • fast repairs for coatings • marine 35-90°F (2-32°C) corrosion resistance and excellent freeze/ and hydraulic structures thaw resistance.









TO ORDER, CONTACT YOUR FIVE STAR DISTRIBUTOR

For product information FiveStarProducts.com

